


Instruments

| P/N | Name | Quantity |
|-----------|---|----------|
| 19500100E | Entry Drill Guide | 1 |
| 19500200E | Entry Drill Guide Sleeve for Guide Wire | 1 |
| 19500300E | Entry Reamer, Tibia | 1 |
| 14203400E | Ø3.2×400 Threaded Guide Wire | 4 |
| 10104800E | Tissue Protector | 1 |
| 19600500E | Universal Chuck with T-handle | 1 |
| 19600600E | Instrument for Closed Reduction | 1 |
| 10103800E | Guide wire with spherical head, Ø2.5 | 1 |
| 10103301E | Flexible Reamer Shaft, Ø7.5 | 1 |
| 10103302E | Flexible Reamer Shaft, Ø8.6 | 1 |
| 10103207E | Flexible Reamer Head, Ø7.5 | 1 |
| 10103208E | Flexible Reamer Head, Ø8 | 1 |
| 10103285E | Flexible Reamer Head, Ø8.5 | 1 |
| 10103209E | Flexible Reamer Head, Ø9 | 1 |
| 10103295E | Flexible Reamer Head, Ø9.5 | 1 |
| 10103210E | Flexible Reamer Head, Ø10 | 1 |
| 10103215E | Flexible Reamer Head, Ø10.5 | 1 |
| 10103211E | Flexible Reamer Head, Ø11 | 1 |
| 10103205E | Flexible Reamer Head, Ø11.5 | 1 |
| 19500400E | Impactor | 1 |
| 19500500E | Aiming Device | 1 |
| 19500501E | Insertion Handle | 1 |
| 19500502E | Connector for Proximal Aiming Arm | 1 |
| 19500503E | Connector for Distal Aiming Arm | 1 |
| 19500504E | Adjustable Aiming Device | 1 |
| 19500505E | Transverse Targeting Arm | 1 |
| 19500506E | Locking Bolt | 2 |
| 19500507E | Proximal Aiming Device, double transverse holes | 1 |
| 19500508E | Proximal Aiming Device, cross locking holes | 1 |

| P/N | Name | Quantity |
|-----------|--|----------|
| 19500509E | Stabilizing Rod | 1 |
| 19500510E | Lateral Stabilizing Rod with threads, Ø8.5 | 1 |
| 19500511E | Lateral Stabilizing Rod with threads, Ø9 | 1 |
| 19500512E | Lateral Stabilizing Rod with threads, Ø10 | 1 |
| 19600810E | Sleeve for Lateral Stabilizing Rod | 1 |
| 19600807E | Radiolucent Nut | 1 |
| 19500513E | Stabilizing Spacer | 1 |
| 19600816E | Locking Bolt for Targeting Arm | 2 |
| 19600900E | Hexagonal Screwdriver with spherical head, SW7 | 1 |
| 19601000E | Sleeve for Locking Screw | 3 |
| 19601100E | Sleeve for Drill Bit | 2 |
| 19601200E | Tissue Protector | 1 |
| 19603200E | Drill, Ø4 | 3 |
| 19603100E | Stopper for Ø4 Drill | 1 |
| 10101704E | Locating Pin | 2 |
| 19500600E | Drill, Ø3.3 | 3 |
| 19500700E | Pin, Ø3.3 | 2 |
| 19602500E | Drill for Stabilizing Rod | 1 |
| 19500800E | Reamer for Lateral Cortex | 1 |
| 14201900E | Depth Gauge for Locking Bolt | 1 |
| 19601300E | Hexagonal Wrench, SW4.5 | 3 |
| 19602000E | Combined Hammer | 1 |
| 19601600E | Combined Wrench | 1 |
| 19602200E | Hammer Guide | 1 |
| 19500900E | Extractor for Intramedullary Nail | 1 |
| 19501000E | Proximal Compression Shaft | 1 |
| 19501900E | Instrument Box | 1 |
| 19502000E | Screw Box | 1 |

Tibia Nail II System

Brochure

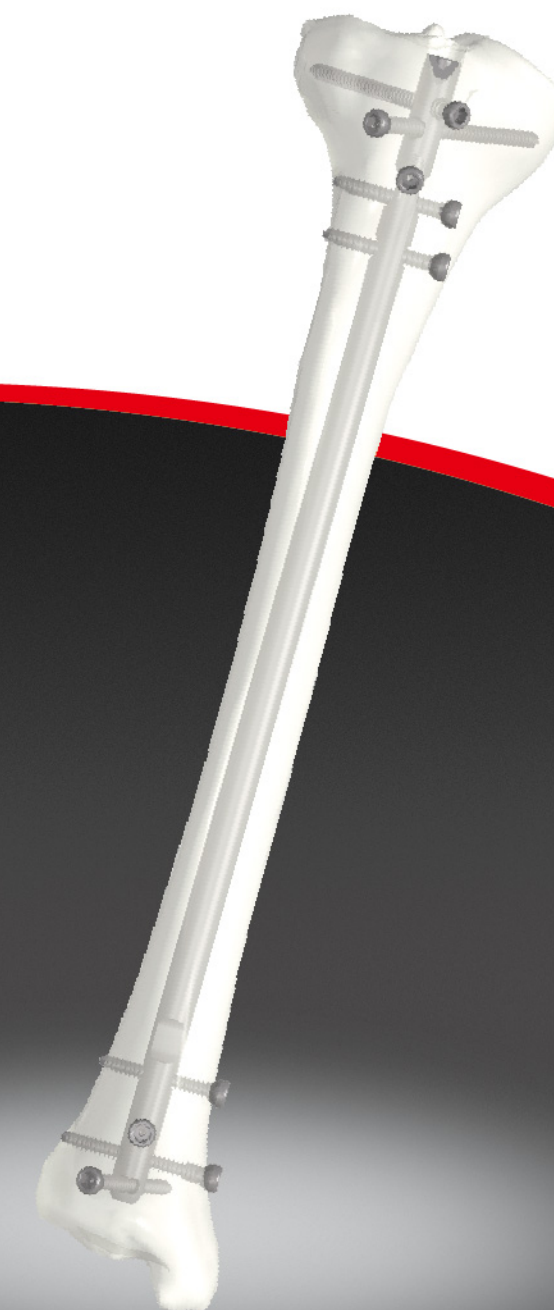

TRAUSON®

Trauson(China) Medical Instrument Co., Ltd

Add:No.9 Long Men Road, Wujin Hi-Tech Industrail Zone, 213164, Changzhou City, Jiangsu Province. P.R.C.
Tel:86-519-86387075 Fax:86-519-86387279 Email:info@trauson.com http://www.trauson.com

08/13/2006-17.pdf

Products you can trust at a price you can afford

Tibia Nail II System

Indications

- Tibial diaphyseal fractures
- Tibial metaphysis fractures
- Certain intra-articular fractures of tibia plateau and PILON fractures



Features & Benefits

Proximal locking

- Multi-plane Locking options, in combination with cancellous bone locking screws, increase the stability of the proximal fragment for intra-articular fractures of tibia.

Distal Locking

- Multi-plane locking options increase the stability of distal fragment Oblique locking screw creates an axially stable angle of 28° to the coronal plane.

Intra-Operative Compression:

- Oblong hole in the coronal plane enable intra-operative compression or post-operative compression.



Distal Targeting Device

- Adjustable radiolucent targeting arm
- Lever-compression targeting arm




Locking Screw Design

- Dual-lead thread and large core diameter increase bending and shear strength
- Dual core shaft design (cortex thread and cancellous thread) for optimized purchase in cancellous bone



End Cap

- Different specifications of end cap, 5 and 10mm end caps may extend nail length if nail is over inserted.



Implants

Tibia Nail II

| P/N(TA) | Dia | Length | Cannulated/Solid |
|-----------|------|--------|------------------|
| 46087260E | Ø8.5 | 260mm | Cannulated |
| 46087280E | Ø8.5 | 280mm | Cannulated |
| 46087300E | Ø8.5 | 300mm | Cannulated |
| 46087320E | Ø8.5 | 320mm | Cannulated |
| 46087340E | Ø8.5 | 340mm | Cannulated |
| 46087360E | Ø8.5 | 360mm | Cannulated |
| 46088260E | Ø9 | 260mm | Cannulated |
| 46088280E | Ø9 | 280mm | Cannulated |
| 46088300E | Ø9 | 300mm | Cannulated |
| 46088320E | Ø9 | 320mm | Cannulated |
| 46088340E | Ø9 | 340mm | Cannulated |
| 46088360E | Ø9 | 360mm | Cannulated |
| 46089260E | Ø10 | 260mm | Cannulated |
| 46089280E | Ø10 | 280mm | Cannulated |
| 46089300E | Ø10 | 300mm | Cannulated |
| 46089320E | Ø10 | 320mm | Cannulated |
| 46089340E | Ø10 | 340mm | Cannulated |
| 46089360E | Ø10 | 360mm | Cannulated |

5.0mm Locking Screw II

| P/N(TA) | Dia | Length |
|-----------|-------|--------|
| 46091035E | 5.0mm | 35mm |
| 46091039E | 5.0mm | 39mm |
| 46091043E | 5.0mm | 43mm |
| 46091047E | 5.0mm | 47mm |
| 46091051E | 5.0mm | 51mm |
| 46091055E | 5.0mm | 55mm |
| 46091059E | 5.0mm | 59mm |
| 46091063E | 5.0mm | 63mm |
| 46091067E | 5.0mm | 67mm |
| 46091071E | 5.0mm | 71mm |
| 46091075E | 5.0mm | 75mm |
| 46091079E | 5.0mm | 79mm |
| 46091083E | 5.0mm | 83mm |
| 46091087E | 5.0mm | 87mm |
| 46091091E | 5.0mm | 91mm |
| 46091095E | 5.0mm | 95mm |

5.0mm Locking Screw I

| P/N(TA) | Dia | Length |
|-----------|-------|--------|
| 46090032E | 5.0mm | 32mm |
| 46090034E | 5.0mm | 34mm |
| 46090036E | 5.0mm | 36mm |
| 46090038E | 5.0mm | 38mm |
| 46090040E | 5.0mm | 40mm |
| 46090042E | 5.0mm | 42mm |
| 46090044E | 5.0mm | 44mm |
| 46090046E | 5.0mm | 46mm |
| 46090048E | 5.0mm | 48mm |
| 46090050E | 5.0mm | 50mm |
| 46090052E | 5.0mm | 52mm |
| 46090054E | 5.0mm | 54mm |
| 46090056E | 5.0mm | 56mm |
| 46090058E | 5.0mm | 58mm |
| 46090060E | 5.0mm | 60mm |
| 46090062E | 5.0mm | 62mm |
| 46090064E | 5.0mm | 64mm |
| 46090066E | 5.0mm | 66mm |
| 46090068E | 5.0mm | 68mm |
| 46090070E | 5.0mm | 70mm |
| 46090072E | 5.0mm | 72mm |
| 46090074E | 5.0mm | 74mm |
| 46090076E | 5.0mm | 76mm |
| 46090078E | 5.0mm | 78mm |
| 46090080E | 5.0mm | 80mm |
| 46090082E | 5.0mm | 82mm |
| 46090084E | 5.0mm | 84mm |
| 46090086E | 5.0mm | 86mm |
| 46090088E | 5.0mm | 88mm |
| 46090090E | 5.0mm | 90mm |

4.5mm Locking Screw I

| P/N(TA) | Dia | Length |
|-----------|-------|--------|
| 46092028E | 4.5mm | 28mm |
| 46092030E | 4.5mm | 30mm |
| 46092032E | 4.5mm | 32mm |
| 46092034E | 4.5mm | 34mm |
| 46092036E | 4.5mm | 36mm |
| 46092038E | 4.5mm | 38mm |
| 46092040E | 4.5mm | 40mm |
| 46092042E | 4.5mm | 42mm |
| 46092044E | 4.5mm | 44mm |
| 46092046E | 4.5mm | 46mm |
| 46092048E | 4.5mm | 48mm |
| 46092050E | 4.5mm | 50mm |
| 46092052E | 4.5mm | 52mm |
| 46092054E | 4.5mm | 54mm |
| 46092056E | 4.5mm | 56mm |
| 46092058E | 4.5mm | 58mm |
| 46092060E | 4.5mm | 60mm |
| 46092062E | 4.5mm | 62mm |
| 46092064E | 4.5mm | 64mm |
| 46092066E | 4.5mm | 66mm |
| 46092068E | 4.5mm | 68mm |
| 46092070E | 4.5mm | 70mm |
| 46092072E | 4.5mm | 72mm |
| 46092074E | 4.5mm | 74mm |
| 46092076E | 4.5mm | 76mm |
| 46092078E | 4.5mm | 78mm |
| 46092080E | 4.5mm | 80mm |

4.5mm Locking Screw II

| P/N(TA) | Dia | Length |
|-----------|-------|--------|
| 46093027E | 4.5mm | 27mm |
| 46093029E | 4.5mm | 29mm |
| 46093031E | 4.5mm | 31mm |
| 46093033E | 4.5mm | 33mm |
| 46093035E | 4.5mm | 35mm |
| 46093037E | 4.5mm | 37mm |
| 46093039E | 4.5mm | 39mm |
| 46093041E | 4.5mm | 41mm |
| 46093043E | 4.5mm | 43mm |
| 46093045E | 4.5mm | 45mm |
| 46093047E | 4.5mm | 47mm |
| 46093049E | 4.5mm | 49mm |
| 46093051E | 4.5mm | 51mm |
| 46093053E | 4.5mm | 53mm |
| 46093055E | 4.5mm | 55mm |
| 46093057E | 4.5mm | 57mm |
| 46093059E | 4.5mm | 59mm |
| 46093061E | 4.5mm | 61mm |
| 46093063E | 4.5mm | 63mm |
| 46093065E | 4.5mm | 65mm |
| 46093067E | 4.5mm | 67mm |
| 46093069E | 4.5mm | 69mm |
| 46093071E | 4.5mm | 71mm |
| 46093073E | 4.5mm | 73mm |
| 46093075E | 4.5mm | 75mm |
| 46093077E | 4.5mm | 77mm |
| 46093079E | 4.5mm | 79mm |

End Cap

| P/N(TA) | Specification |
|-----------|---------------|
| 46094005E | 5mm |
| 46094010E | 10mm |